

LED POWER SUPPLY DATASHEET



SNP200-12VF-1

DESCRIPTION

linetype design, very helpful for the limited space lighting applications, it has advantages in cabinet, furniture and light boxes application, meet new EU directive and ErP request, lifetime reach 30000hrs.



Input

| Items | Conditions | Request | Note |
|-----------------|---|--|--------|
| Input voltage | Ta | AC200-240V | -- |
| Input frequency | | 50/60Hz | -- |
| Input current | 25°C, rated input voltage, output with max. rated power | < 1.5A | -- |
| Input power | | < 200W | -- |
| Efficiency | | ≥ 92 % | -- |
| Standby | | 25°C, rated input voltage, output without load | <0.21W |
| Inrush current | 25°C, rated input voltage | <75A | peak |
| PF | 25°C, rated input voltage, output max. rated power | ≥ 0.95 | -- |

Temperature and others

| Items | Conditions | Request | Note |
|-------------------|---|----------|------|
| Operation temp. | -- | -20-45°C | -- |
| Relative humidity | -- | 45%-85% | -- |
| Max. case temp. | -- | 85°C | -- |
| Lifetime | Max. Ta, rated input voltage, output with max. rated power | 30,000hr | -- |
| Working noise | 25°C, rated input voltage, output with rated power, mute box background noise < 35dB, pickup 10cm | yes | -- |

Protection

| Item | Conditions | Request | Note |
|------------------|---|---------|------|
| Open circuit | Ta, rated input voltage, no load | -- | -- |
| Over load | Ta, 0.94-1.06 times of input voltage, 1.6 times of rated power | yes | -- |
| Short circuit | Ta, 0.94-1.06 times of input voltage | yes | -- |
| Over temperature | Ta, 0.94-1.06 times of input voltage, temperature detected pointed more than 115 degree | yes | -- |
| Over voltage | Ta, 0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one | yes | -- |
| Auto recovery | Over load, short circuit revocation | yes | -- |
| Latch off | Over voltage, over heat re-start after cut off | yes | -- |

Output

| Items | Conditions | Request | Note |
|------------------------------|---|----------|------|
| Startup time | 25°C, rated input voltage, output with max. rated power | < 0.5S | -- |
| Output voltage and precision | Ta, rated input voltage, output with rated power | 12V ± 5% | -- |
| Output current range | Ta, rated input voltage | 0-15A | |
| Output voltage wave | 25°C, rated input voltage, output with max. rated power | 300mV | Vp-p |
| Output overload | 25°C, rated input voltage, output with 2 times LED load | yes | -- |
| Output current and precision | Ta, rated input voltage, output with rated power | -- | -- |
| Rated output voltage range | Ta, rated input voltage | -- | -- |
| Output current wave | 25°C, rated input voltage, output with max. rated power | -- | Ip-p |
| Dimming mode | -- | -- | -- |
| Dimming range | -- | -- | -- |

Mechanical, mounting


| Items | Conditions |
|-------------------------|----------------------------|
| Case material and size | Plastic case |
| Mounting ways | Independent |
| Insulation type | Class II |
| IP grade | IP20 |
| Input cables dimension | H05RN-F 1.0mm ² |
| Output cables dimension | H05RN-F 1.0mm ² |
| Output cables length | Max 2m |

Standard


| Items | Conditions |
|----------|---|
| Safety | IEC61347-1, IEC61347-2-13 |
| Harmonic | EN61000-3-2 Class C |
| EMI | EN55015 |
| EMS | EN61000-4-2, 3, 4, 5, 6, 8, 11 EN61547 |



● **Dimensions(mm)**

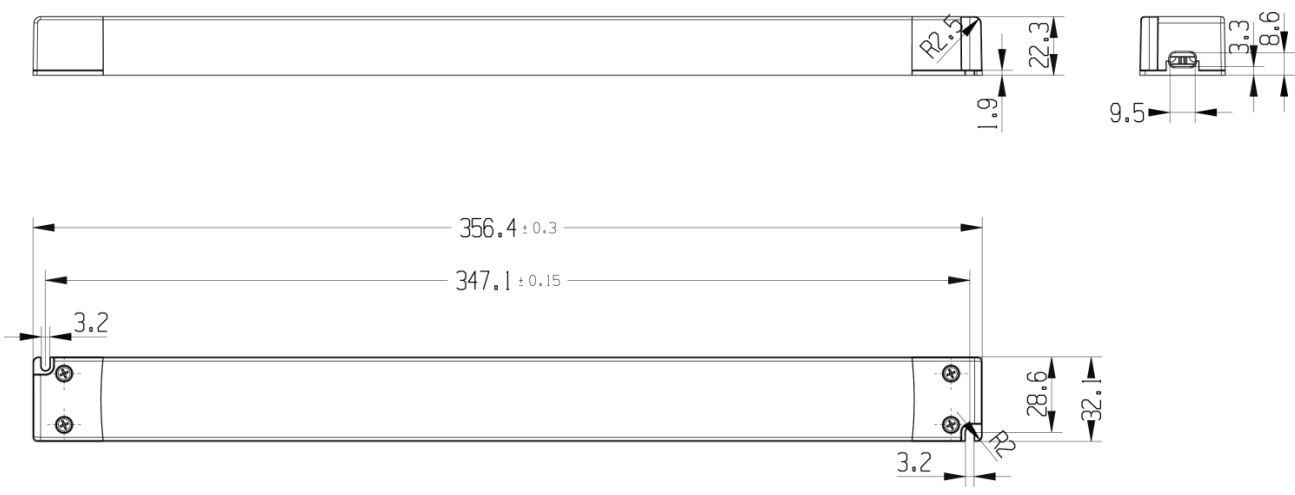

● **Wiring Diagram**

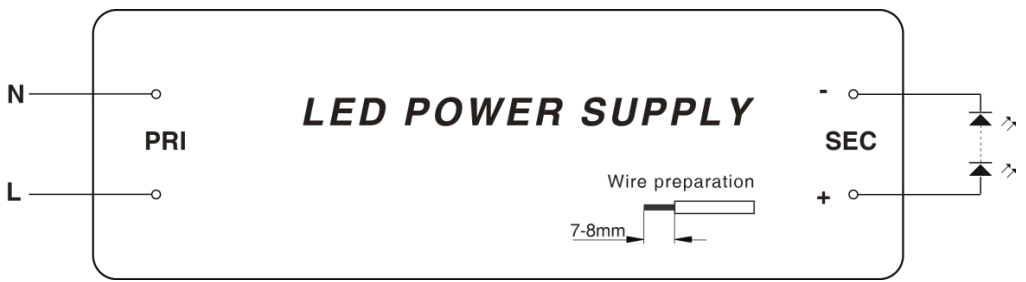



LED POWER SUPPLY DATASHEET

SL200-24VF

DESCRIPTION

High Cost Performance, SELV, Open circuit, short circuit, overload and over temperature protection. Compliance to ERP directive, lifetime 30,000hrs.



-Input

| Items | Conditions | Request | Note |
|-----------------|---|------------|---------|
| Input voltage | Ta | 220-240Vac | -- |
| Input frequency | | 50/60Hz | -- |
| Input current | | < 1.3A | -- |
| Input power | 25°C, rated input voltage, output with max. rated power | < 218W | -- |
| Efficiency | | ≥90% | -- |
| Standby | 25°C, rated input voltage, output without load | <0.21W | average |
| Inrush current | 25°C, rated input voltage | <75A | peak |
| PF | 25°C, rated input voltage, output max. rated power | ≥0.9 | -- |
| | | | |
| | | | |

-Output

| Items | Conditions | Request | Note |
|-----------------------------|---|---------|------|
| Startup time | 25°C, rated input voltage, output with max. rated power | <0.5S | -- |
| Output voltage and precisio | Ta, rated input voltage, output with rated power | 24V±5% | -- |
| Output current range | Ta, rated input voltage | 0-8.33A | |
| Output voltage wave | 25°C, rated input voltage, output with max. rated power | <480mV | Vp-p |
| Output overload | 25°C, rated input voltage, output with 2 times LED load | yes | -- |
| Output current and precisio | Ta, rated input voltage, output with rated power | -- | -- |
| Rated output voltage range | Ta, rated input voltage | -- | -- |
| Output current wave | 25°C, rated input voltage, output with max. rated power | -- | Ip-p |
| Dimming mode | -- | -- | -- |
| Dimming range | -- | -- | -- |

-Temperate and others

| Item | Conditions | Request | Note |
|-------------------|--|----------|------|
| Operation temp. | -- | -20-45°C | -- |
| Relative humidity | -- | 45%-85% | -- |
| Max. case temp. | -- | 90°C | -- |
| Lifetime | Max.Ta, rated input voltage, output with max. rated power | 30,000hr | -- |
| Working noise | 25°C, rated input voltage, output with rated power, mute box background noise<35dB, pickup 10cm distance from products | yes | -- |
| | | | |
| | | | |

-Mechanical, mounting

| Items | Conditions |
|-------------------------|----------------|
| Case material and size | Plastic case |
| Mounting ways | Independent |
| Insulation type | Class II |
| IP grade | IP20 |
| Input cables dimension | Terminal Block |
| Output cables dimension | Terminal Block |
| Output cables length | -- |


-Protection

| Items | Conditions | Request | Note |
|------------------|---|---------|------|
| Open circuit | Ta, rated input voltage, no load | yes | -- |
| Over load | Ta, 0.94-1.06 times of input voltage, 2.0 times of rated power | yes | -- |
| Short circuit | Ta, 0.94-1.06 times of input voltage | yes | -- |
| Over temperature | Ta, 0.94-1.06 times of input voltage, temperature detected pointed more than 115 degree | yes | -- |
| Over voltage | Ta, 0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one | yes | -- |
| Auto recovery | Over load, short circuit revocation | yes | -- |
| Latch off | Over heat and over voltage re-start after cut off | yes | -- |

-Standard

| Items | Conditions |
|----------|---------------------------|
| Safety | IEC61347-1, IEC61347-2-13 |
| Harmonic | EN61000-3-2 Class C |
| EMI | EN55015 |
| EMS | EN61547 |
| | |
| | |

Dimensions(mm)

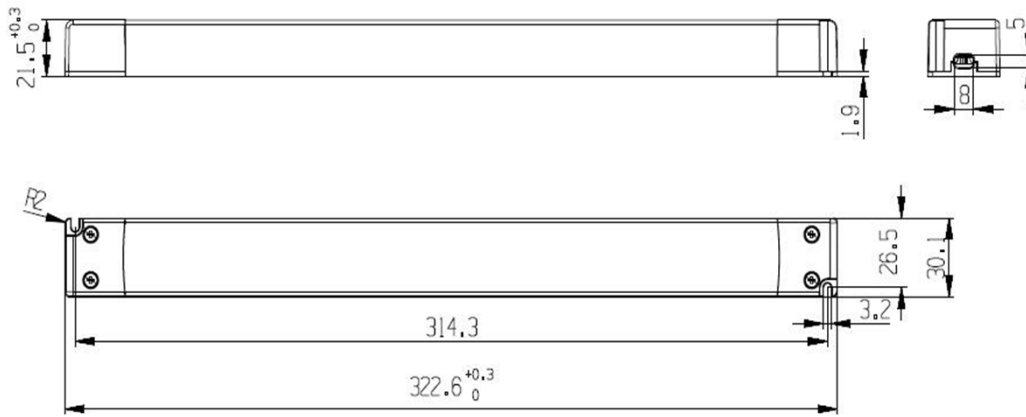

Wiring Diagram

